

Parking Lifts

SKU# 5175154

18,000-lb. Total Cap Parking Lift / Triple / Independent Platforms

Questions? Contact a BendPak Parking Specialist!


parking@bendpak.com | 1-866-900-PARK (7275)

Monday - Friday, 7AM to 4:30PM PST

The Sexiest Vehicle Stacker Money Can Buy

The PL-6KT triple-wide [parking lift](#) is one of the most efficient parking units ever designed. The key to its design is a streamlined, four-column structure that leaves all three lifting platforms free from surrounding posts, making it safer and easier to enter and exit parked vehicles.

This parking lift is equally useful in large residential garages and commercial spaces. Municipal parking lots and custom shops looking for extra parking don't need to waste money buying multiple lifts that may or may not even fit in their space. A triple-wide lift is the most efficient way to turn three parking spots into six.

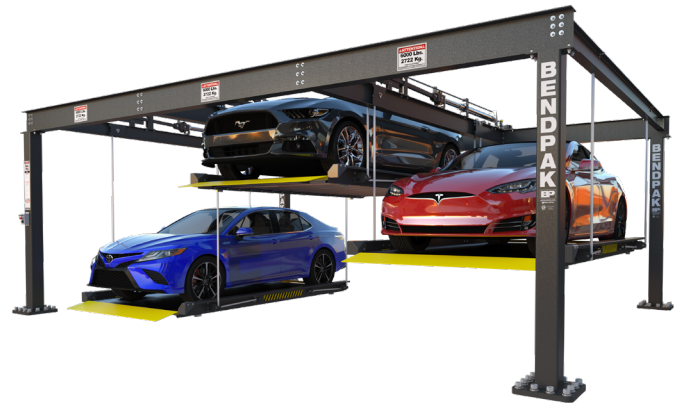

Features

- 6,000-lb. capacity per deck
- Perfect for cars, light trucks, motorcycles and ATVs
- Rugged I-beam and C-channel construction
- Built-in wheel stops
- Wide base-plate for maximum stability
- Front and rear wheel chocks
- Superstructure features durable powder-coat finish
- Dual hydraulic cylinders with heavy-duty steel lifting cable
- Heavy-duty steel construction
- Reliable electric-hydraulic power system
- Full-width platform to keep bottom vehicles protected
- Simple controls
- Oversized sheave diameter reduces cable fatigue
- High-speed lifting
- Features heavy-duty 3/8" aircraft cable
- Rugged 1.25" roller axles
- Multi-position safety locks in each column
- Runways feature non-skid surface
- Push-button pneumatic safety release
- Independent backup slack-cable safety latches
- Customizable power unit location

Specifications

| | |
|-----------------------------|------------------------------------|
| Lifting Capacity | 6,000 lbs. (2,722 kg) Cap Per Deck |
| Overall Width | 308" (7,834 mm) |
| Overall Length | 236.5" (6,008 mm) |
| Overall Height | 123.75" (3,140 mm) |
| Min. Runway Height | 9" (230 mm) |
| Max. Rise | 89" (2,261 mm) |
| Width Between Posts | 283" (7,197 mm) |
| Platform Width | 82" (2,086 mm) |
| Platform Length | 152" (3,862 mm) |
| Drive-thru Clearance | 93" (2,374 mm) |
| Locking Positions | 1 / Adjustable |
| Lifting Time | 30 sec |
| Standard Motor | 220 VAC / 60 Hz / 1Ph |

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for complete listings or contact BendPak via contact@bendpak.com.

PL-6KT

BendPak®

Parking Lifts

SKU# 5175154

18,000-lb. Total Cap Parking Lift / Triple / Independent Platforms

Questions? Contact a BendPak Parking Specialist!

parking@bendpak.com | 1-866-900-PARK (7275)

Monday - Friday, 7AM to 4:30PM PST



One lift houses six vehicles

If you're in need of a lot of extra parking, your first instinct may be to buy multiple parking lifts. However, the smarter bet is to order a BendPak triple-wide, independent platform lift. These unique lifts house six vehicles for long or short-term storage. It's much more space-efficient to buy one extra-wide car lift than it is to buy three smaller ones. Each platform will lift and hold up to 6,000 lbs., so a total of 18,000 lbs. can be loaded up at a time.

Single-position, auto-engaging lock

All three platforms automatically lock into place at the max rise position. This is the safest way to store vehicles on your parking lift, as the platform and hydraulic/suspension system are virtually incapable of failing, even in the extremely unlikely event of hydraulic hose or cable failure.

Three independent platforms

Three full-width, galvanized steel platforms cover the length and width of this car lift. Resistant to oil, weather and abuse, these decks will easily last the lifetime of your unit. Each platform moves independently of the other two, which means more vehicles can be stored without rummaging through the entire bottom row just to get to one raised vehicle. The PL-6KT is a triple-wide marvel that keeps you organized without slowing you down.

Internally routed hydraulic lines and cables

All hydraulic lifting cylinders and lifting cables are routed internally throughout the mammoth structure of this lift. Clever engineering prevents the extensive network of cables from awkwardly crossing over each other, so the platforms rise and descend safely at all times.



BendPak®



1645 Lemonwood Dr, Santa Paula, CA 93060

© 2022 BendPak Inc. All rights reserved.